

Vacuum Toilet Blockage Remover

>VTBR2<



AIRBUS CERTIFIED

The "VACUUM TOILET BLOCKAGE REMOVER <VTBR2>" serves as universally applicable equipment to clear and remove pipeline blockage of vacuum-lavatory systems on A/C (ATA Chapter 38).

Applicable for all A/C with vacuum-toilet, e.g.:

- A318 / A319 / A320 / A321 (TEB 320-D0441)
- A330 / A340 (TEB 340-D0711)
- A350 (TEB 350-D0290)
- A380 (TEB 380-D0423)
- B737
- B767
- B747
- B777
- B787


- > Simple, manual operation
- > Autonomous due to integrated diesel engine
- > Connection for tank drainage with Waste Service Truck

Certifications:

certified for the use on A320 ALL, A330/A340 ALL, A350 ALL, A380 ALL

TECHNICAL DATA

<p>> Electrical supply (requirements):</p> <p>Mains supply: 3/PE AC 50/60Hz 380-480V Nominal current: 32A Performance: 6.5kVA Prefuse: 32AgL</p>	<p>> Diesel-engine electrical generator:</p> <p>Cubic capacity: 442ccm Consumption: approx. 1.2l/h (0.3USgal) Tank content: 27l (7USgal)</p>
<p>> Pneumatic parameters:</p> <p>Performance of vacuum pumps: -0.3 to -0.85bar</p>	<p>> Weight:</p> <p>Weight: approx. 1,350kg (approx. 2,976lbs)</p>
<p>> Operating conditions:</p> <p>Ambient temperature: 5°C to 40°C (41 to 104°F) Storage temperature: 0°C to 60°C (32 to 140°F) Air humidity: 5 to 90% (non condensing) Altitude: max. 2,600m MSL (8,530ft)</p>	<p>> Tank volume:</p> <p>Tank: 300l (79USgal)</p>
<p>> Transport options:</p> <ul style="list-style-type: none"> - Standard chassis - Trailer platform - Installation into van 	<p>> Accessories:</p> <p>Extensive standard accessories included in the scope of delivery</p> <p>Accessory Adapter Waste Tank Drain: Adapter 4" waste drain and 2x 2m 4" suction hose with DN100 integration</p>

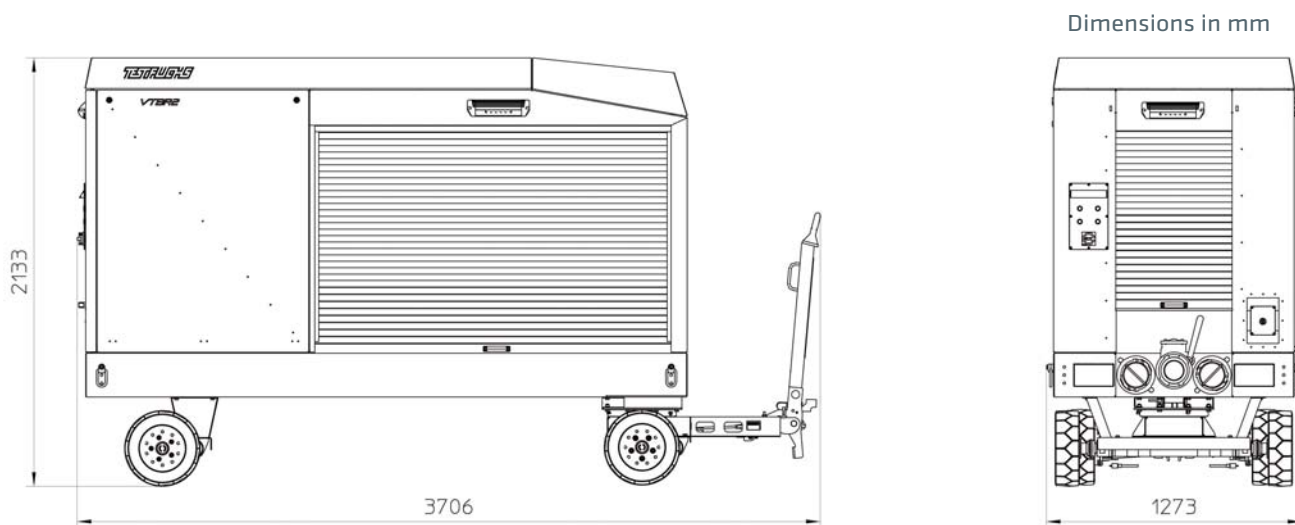

* Variant trailer platform: approx. 4800x1500x2200mm (LxWxH)

* Variant van: approx. 3043x1273x1690mm (LxWxH)