


Vacuum Toilet Leak Tester For A318/A319/A320/A321 >VTLT2<

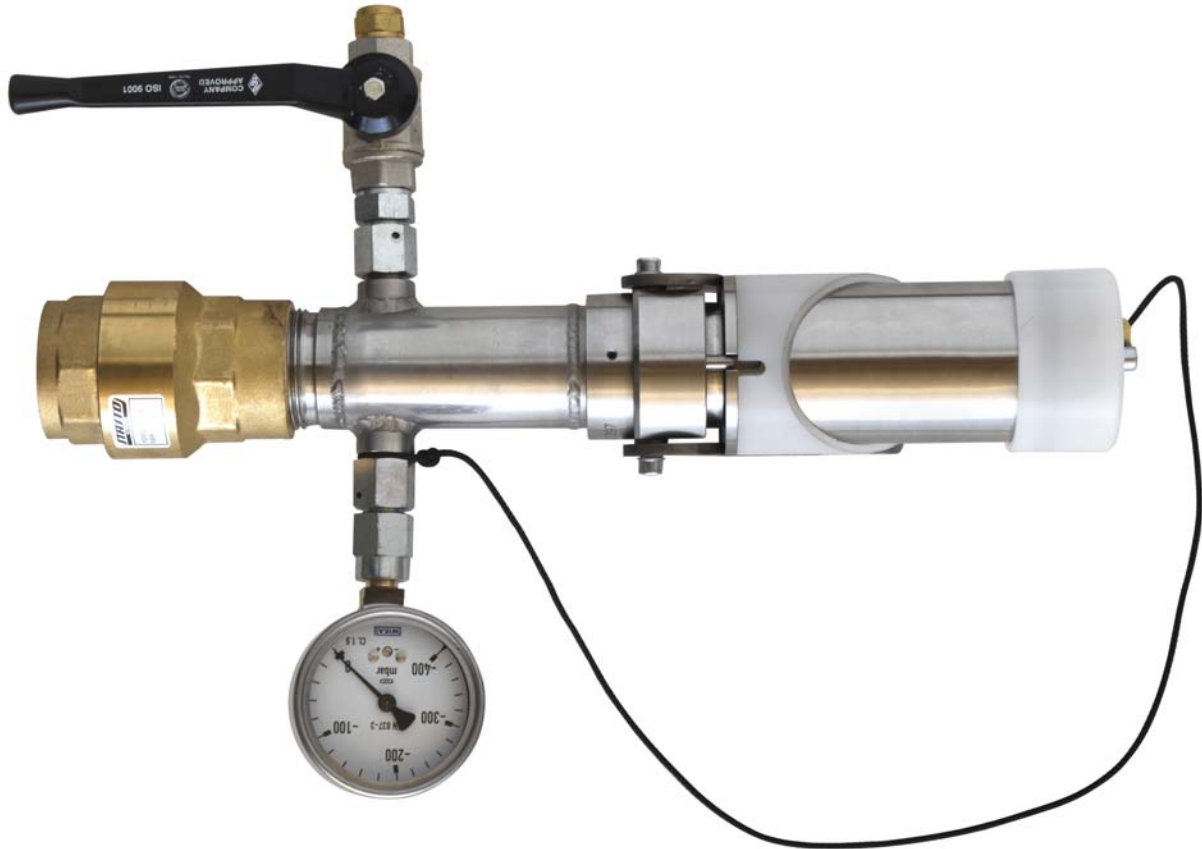

The “VACUUM TOILET LEAK TESTER <VTLT2>” is developed for quick and easy leakage tests without any additional equipment.

The required vacuum is generated by the aircraft system.

Pressure gauge 0 to 1 bar (CL. 1.6)

AMM Task: 38-31-00-790-002-A

> Function:

The Overboard Vent Adapter is attached to the connection on the aircraft. If the toggle lever is pulled down the Overboard Vent Adapter is sealed. To ensure complete sealing, the ball valve must be closed.

If this is the case the drainage system of the aircraft toilets can be tested for leaks with the vacuum generated by the aircraft. At the same time, the pressure gauge measures low pressure.

To remove the “VACUUM TOILET LEAK TESTER <VTLT2>”, the ball valve must be opened and the toggle lever must be pulled up again.